



VILLAGE OF MILFORD/ MILFORD DOWNTOWN DEVELOPMENT AUTHORITY

2019

REQUEST FOR PROPOSALS FOR CONSTRUCTION

MILFORD DOG PARK FENCING

Owner: Village of Milford
1100 Atlantic Street
Milford, MI 48381

Contact Persons: Ann Barnette, DDA Executive Director, 248-684-9719o, 248-396-8424c
Robert Calley, DPS Director, 248-694-3055

Contact Emails: abarnette@villageofmilford.org, rcalley@villageofmilford.org

Project Timeline:

July 18-25, 2019	Advertise for Bids
August 1, 2019	Bids Due 2:00 pm
August 5, 2019	Award Contract
August 15, 2019	Install Fencing*

*Bidder is encouraged to provide alternative dates if can't meet this timing.

1. REQUEST

The Village of Milford DDA is seeking proposals from commercial grade fencing companies to install farm-style welded wire fencing and posts for the Milford Dog Park, which is to be located in a field due west of the CVS at Milford and General Motors. The proposed park is a combination small-dog and large-dog park, the combined area of which is approximately 1.3 acres.

2. PROJECT REQUIREMENTS

All Project plans must meet all applicable engineering standards and federal, state and local requirements, including compliance with state and federal barrier-free accessibility requirements of 1976 PA 453 (Elliot-Larsen Civil Rights Act) and a1976 PA 220 (Persons with Disabilities Civil Rights Act), as amended. In accordance with these laws, all contracts must contain a covenant by the consultant and any sub-consultants not to discriminate against and employee or applicant for employment with respect to hire, tenure, terms, conditions, or privileges of employment, or a matter directly or indirectly

related to employment that is unrelated to the individual's ability to perform the duties of a particular job or position.

3. CRITERIA FOR SELECTION

The following factors will be taken into consideration in the selection process:

- a. Qualifications of the firm and individuals responsible for the work
- b. Experience with similar projects
- c. Accessibility of the staff and proximity to the project location
- d. Price

4. RIGHT RESERVED BY THE VILLAGE

The Village of Milford and Milford DDA reserves the right to reject any or all quotes, waive irregularities in submissions in the best interest of the Village, to reject quotes which do not conform to the requirements, to reissue this request and to request additional information. The Village/DDA reserves the right to negotiate the terms and conditions of all or any part of the project or to accept any quote determined by the Village/DDA to be in the best interest of the Village and successful completion of the project.

5. INSURANCE REQUIREMENTS

The contract will be required to carry Worker's Compensation Insurance, Bodily Injury and Property Damage, Automotive, and Owner's Protective Liability in the amount of \$100,000. Certificates of such insurance must be attached to each copy of the executed contract documents.

6. CONTENT OF THE PROPOSAL

- Information regarding the company
- Related project experience of the firm
- A lump sum amount for providing scope services for the project
- Three copies of the proposal
- Detailed list of deliverables

7. SUBMISSION OF PROPOSALS

Three (3) copies of the proposal shall be marked 'MILFORD DOG PARK FENCING' and submitted to:

Village of Milford Civic Center

1100 Atlantic Street

Milford, Michigan

Bids shall be Sealed


Bids will be accepted up until 2:00 pm on Thursday, August 1, 2019

8. SPECIFICATIONS

Project Name:		MILFORD DOG PARK			
Proposal shall include all labor and material necessary to perform the following work. (PROJECT WILL BE SURVEYED AND STAKED BY OTHERS PRIOR TO CONSTRUCTION)					
QTY	UNIT		DESCRIPTION	Unit Price	Total
					Lump Sum
1000	LN/FT	Wire	<p>Standard galvanized, welded, farm-style wire with the top and bottom strands of number 12 1/2 gauge or larger. Vertical stay wires shall be 14 1/2 gauge or larger and spaced not more than 4"-6" apart.</p> <p>High tensile steel (14.5" gauge), class II galvanized may also be used.</p> <p>Finished heights should be at least 48 in above ground</p>		
+/- 100	Each	Posts	<p>Round wood fence posts of at least 6" to 7" in diameter</p> <p>May use new preservative wooden posts the meet Federal TT-W-571 or AWPA specifications, see below treatment options*,or</p> <p>High quality, untreated posts of red cedar with one-half diameter made of heartwood, pine heartwood, osage orange, black and honey locust, catalpa or mulberry</p> <p>Wood posts shall be placed > 2 ft in the ground and steel posts driven > 18 in in the ground. Sandy or moist soils may require deeper placement</p>		
3	Each	Gates	<p>Install a new 4 foot wide by 4 foot high galvanized welded wire single swing gate with a steel frame and treated wood fence</p> <p>Contractor shall supply a shop drawing of the gate before work commences</p>		
2	Each	Gates	<p>Install a new 8 foot wide by 4 foot high galvanized welded wire double swing gate with a steel frame and treated wood fence</p> <p>Contractor shall supply a shop drawing of the gate before work commences</p>		
1	Lump		Contractor shall remove all excavated dirt as part of Work		

Treatment	Retention lb./ft ³
Creosote coal tar	8
Copper naphthenate .055	0.055
Pentachlorophenol .4	0.4
Amoniacal copper zinc arsenate .4	0.4
Alkaline copper quat (ACO)* .4	0.4
Copper azole, type B (CA-B)* .21	0.21
Copper azole, type C (CA-C)* .15	0.15
Dispersed copper azole (ESR) .15	0.15


Business Name	
Contact	Email:
Address	
Phone Number	Email:
TOTAL LUMP SUM COST	\$

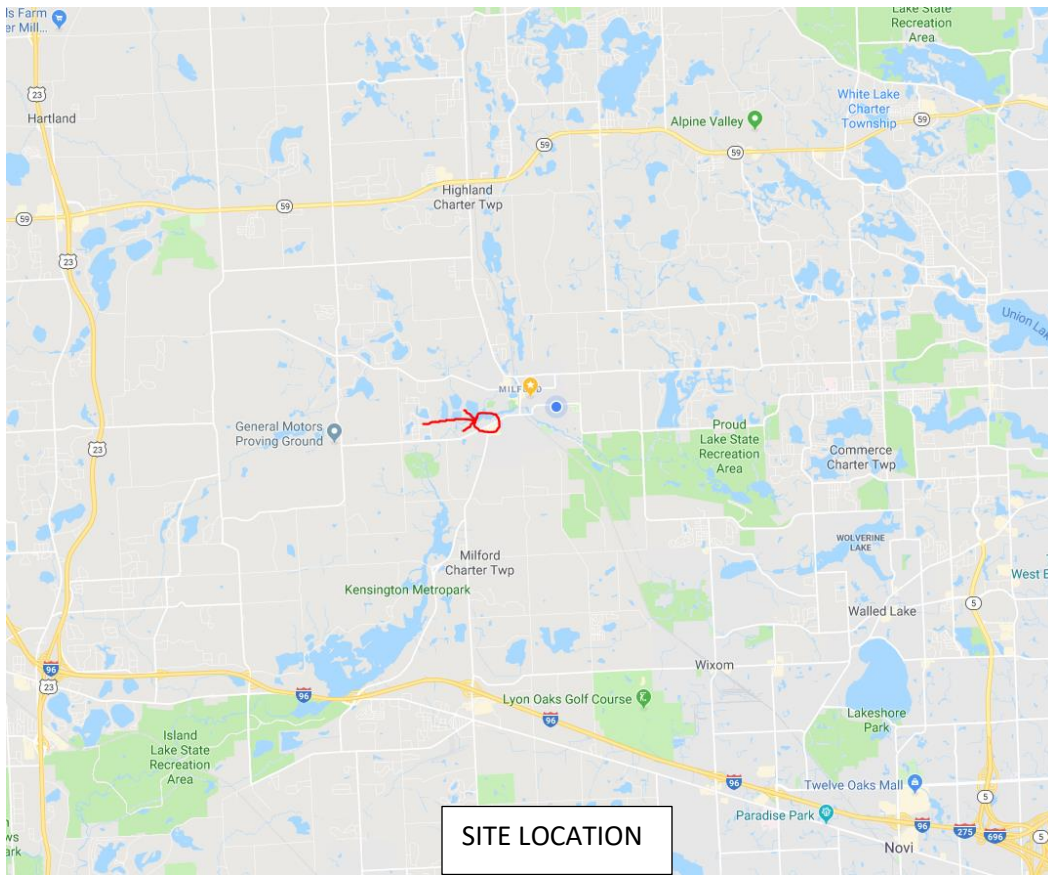

SITE LOCATION



PROJECT SKETCH:
 Site will be Survey and staked prior to Contract Work by Others



PHOTOS OF SIMILAR FENCING



Fencing should have narrower openings at the bottom to prohibit small animals from getting through, and can graduate to larger openings toward the top



